

## Description

Model HS56-90 is a high-speed water spray nozzle which delivers a full cone spray of water from the nozzle in an angle of  $90^\circ \pm 5\%$ . The nozzles functions with a water pressures of 2-6 bar making it possible to utilize the nozzles in very harsh wind conditions.

Model HS56-90 Nozzles have a K-factor of  $56.0 \pm 5\%$  (liter/minute/ $\sqrt{\text{bar}}$ ).

Model HS56-90 High Speed Nozzles are available with 1" BSP & NPT male connections.

All internal water ways have diameters larger than 3mm. Nozzles should only be utilized in pipe systems with clean internal pipe surfaces and cavities. Nozzles should be installed in systems with a main-line water strainer with mesh size equal to or less than 3mm.

## Applications


The Model HS56-90 nozzle is designed for fire protection of car deck on ferries where the area is open in one or both ends.

## Approvals


The Model HS56-90 is component tested in accordance with IMO MSC Circ 1165 and holding DnVGL MED-B Approval.

## Technical data

General Description			
Approved water pressure	2-6 bar		
Spray Angle	$90^\circ \pm 5\%$ .		
K-value	$56,0 \pm 5\%$ (l/min/ $\sqrt{\text{bar}}$ )		
Connections	1" BSP / 1" NPT male		
Nozzle Materials and weight	Brass	CuZn58.	0,20 Kg
	Brass w. NiSn plating	CuZn58 + NiSn	0,20 Kg
	Naval Brass*	CuZn35Ni	0,20 Kg
	Stainless Steel	AISI 316	0,18 Kg
	Titanium	Grade 2	0,12 Kg
	Super Duplex	25Cr	
Strainer Materials	Copper	Cu	
	Copper w. NiSn plating	Cu + NiSn	
	Stainless Steel	AISI 316	
	Titanium	Grade 2	

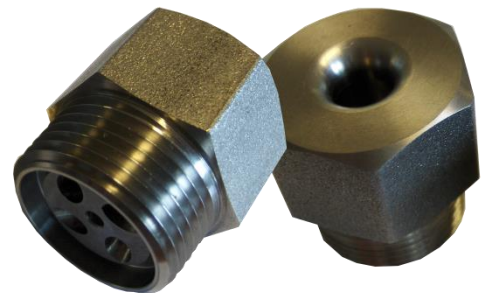

## Dimension

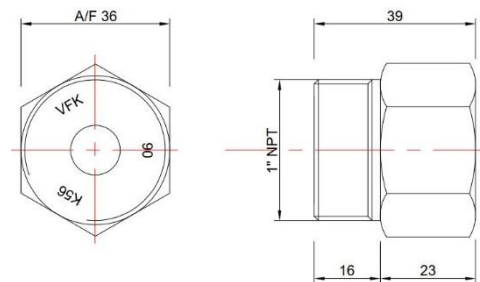

Naval brass with DnVGL Approval

## Contact

For further information on **FIRE KILL™** products, please contact our sales department at [Sales@vidaps.dk](mailto:Sales@vidaps.dk)

## Installation


The nozzle shall be installed in a pendent position. Systems requiring 5 l/min/m<sup>2</sup> shall be designed with maximum 3,20 meter spacing and maximum 1,60 meter to bulkhead.

Systems requiring 10 l/min/m<sup>2</sup> shall be designed with maximum 3,20 meter spacing and maximum 1,60 meter to bulkhead.

Systems requiring 15 l/min/m<sup>2</sup> shall be designed with maximum 3,00 meter spacing and maximum 1,50 meter to bulkhead.

Piping should be flushed prior to installation of the nozzles. The nozzles can be used for both fresh water and sea water applications.

## Spray pattern at 2-6

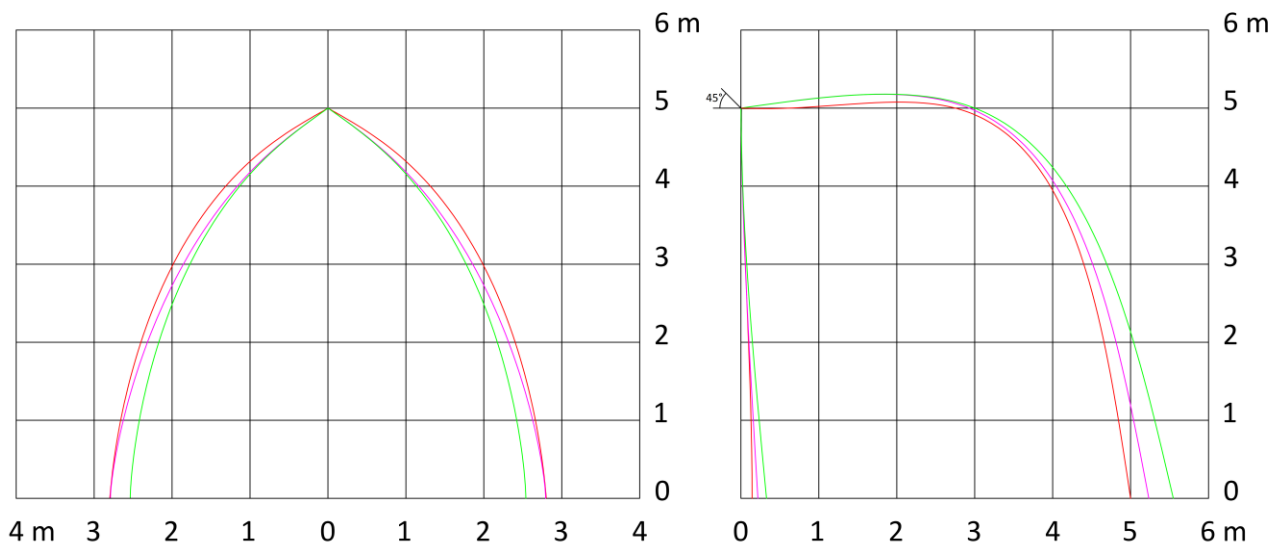

**Red:** 2 Bar  
**Purple:** 3.5 bar  
**Green:** 6 bar